5692 SPECIAL RED TUBE

5692

MEDIUM-MU TWIN TRIODE

Intended for critical industrial applications where 10,000-hour life, extreme uniformity, rigid construction, and exceptional stability are paramount. Within its ratings, the 5692 may be used to replace its receiving-tube counterpart, type 6SN7-GT.

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage	6.3 ± 5%*	ac or dc volts
Current	0.6	amp

Direct Interelectrode Capacitances:°

	Min.	Av.	Max.	
Triode No.1:				
Grid to Plate	3.0	3.5	4.0	μμf
Grid to Cathode	1.8	2.3	2.8	μμf
Plate to Cathode	2.0	2.5	3.0	μμf
Triode No.2:				
Grid to Plate	2.8	3.3	3.8	μμf
Grid to Cathode	2.1	2.6	3.1	μμf
Plate to Cathode	2.2	2.7	3.2	μμf
Plate of Triode No.1 to Plate of Triode No.2	0.27	0.32	0.37	μμf

* Heater voltage may deviate ± 10% from rated value, provided such deviation occurs for less than 2% of the operating time.

° With no external shield.

Mechanical:

Mounting Position	Any
Maximum Overall Length	2-7/8"
Maximum Seated Length	2-5/16"
Maximum Diameter	1-9/32"
Bulb	T-9
Base	Short Intermediate-Shell Octal 8-Pin, Non-Hygroscopic
Basing Designation for BOTTOM VIEW	8BD

Pin 1 - Grid of Triode No.2
Pin 2 - Plate of Triode No.2
Pin 3 - Cathode of Triode No.2
Pin 4 - Grid of Triode No.1



Pin 5 - Plate of Triode No.1
Pin 6 - Cathode of Triode No.1
Pin 7 - Heater
Pin 8 - Heater

(continued on next page)

5692

5692
MEDIUM-MU TWIN TRIODE

INDUSTRIAL SERVICE

Including applications such as dc amplifiers, audio amplifiers, and relaxation oscillators.

Values are for each unit

Maximum Ratings, ***Absolute Values:***

DC PLATE VOLTAGE	275 max.	volts
DC PLATE-SUPPLY VOLTAGE	330 max.	volts
GRID VOLTAGE:		
Negative bias range	1● min. to 100 max.	volts
Negative peak value	200 max.	volts
DC GRID CURRENT	2 max.	ma
DC CATHODE CURRENT	15 max.	ma
PLATE DISSIPATION	1.75 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode	100 max.	volts
Heater positive with respect to cathode	100 max.	volts
AMBIENT TEMPERATURE RANGE	−55 to +90	°C

● For resistance-coupled amplifier applications, the negative bias may be as low as 0.5 volt.

Maximum Circuit Value (for any operating condition):

Grid-Circuit Resistance	2 max.	megohms

Characteristics and Range Values:

Heater Volts, 6.3; Plate Volts, 250; Grid Volts, -9

	Min.	Av.	Max.	
Heater Current	0.55	0.6	0.65	amp
Heater-Cathode Current with heater-cathode voltage of ± 100 volts	–	–	5	μamp
Plate Current	4.8	6.5	8.2	ma
Difference in Plate Current between triode units	–	–	2.0	ma
Plate Current for grid voltage of -24 volts	–	–	15	μamp
Reverse Grid Current	–	–	0.2	μamp
Amplification Factor	18	20	22	
Plate Resistance	–	9100	–	ohms
Transconductance	1825	2200	2575	μmhos

Typical Operation as Resistance-Coupled Amplifier (Each Unit)

See RESISTANCE-COUPLED AMPLIFIER CHART No. 13 at front of Receiving Tube Section.

OUTLINE DIMENSIONS for the 5692 are the same as those shown for type 5691

5692

AVERAGE PLATE CHARACTERISTICS
EACH TRIODE UNIT

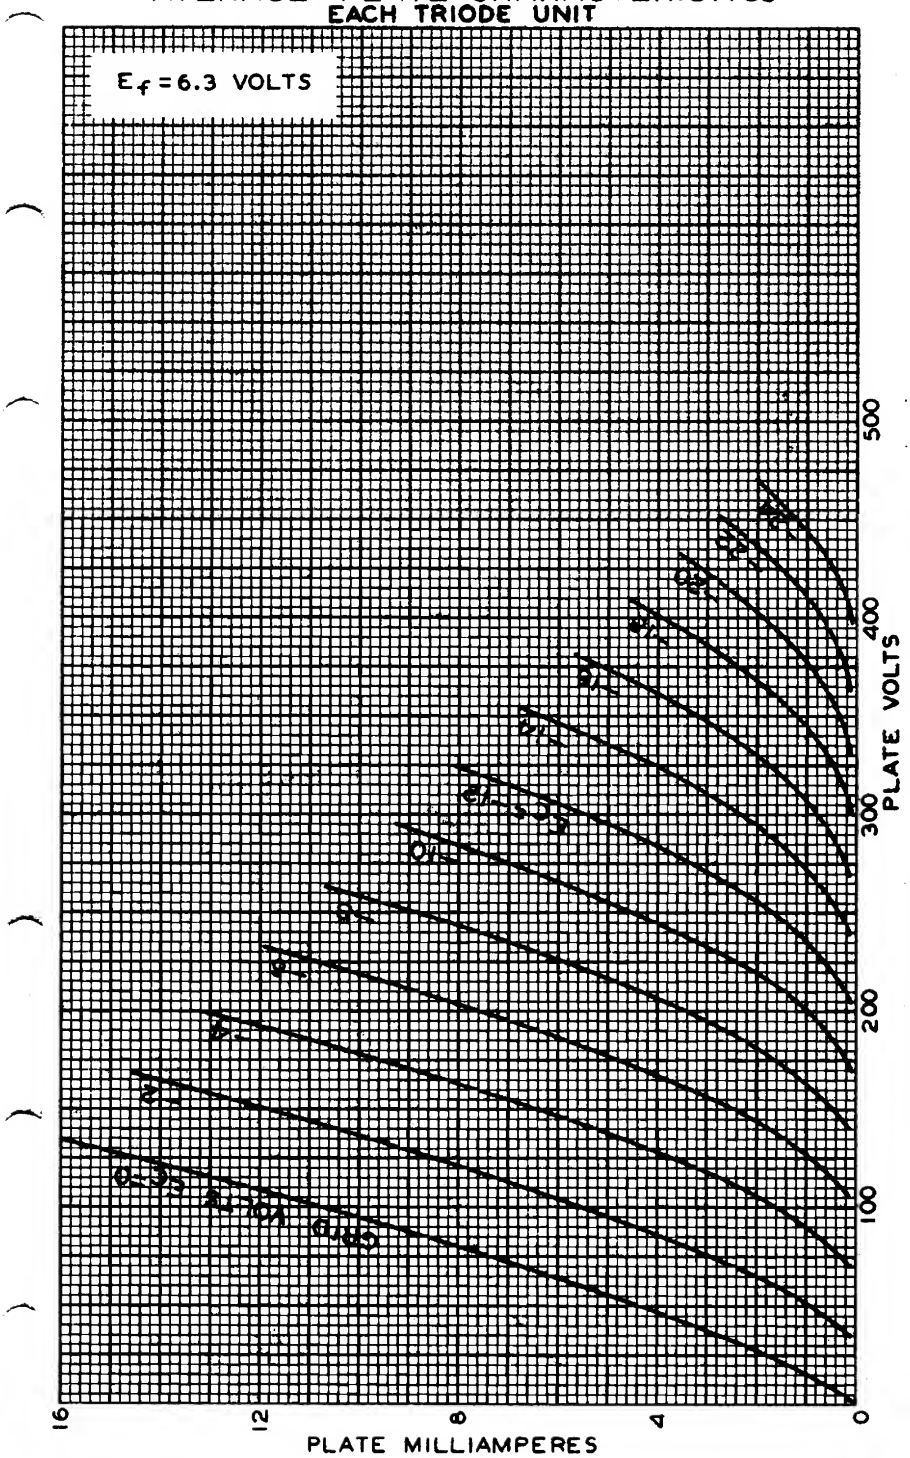

FEB. 21, 1941 TUBE DEPARTMENT 92CM-6257

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

5692

RCA

5692

AVERAGE CHARACTERISTICS

EACH TRIODE UNIT

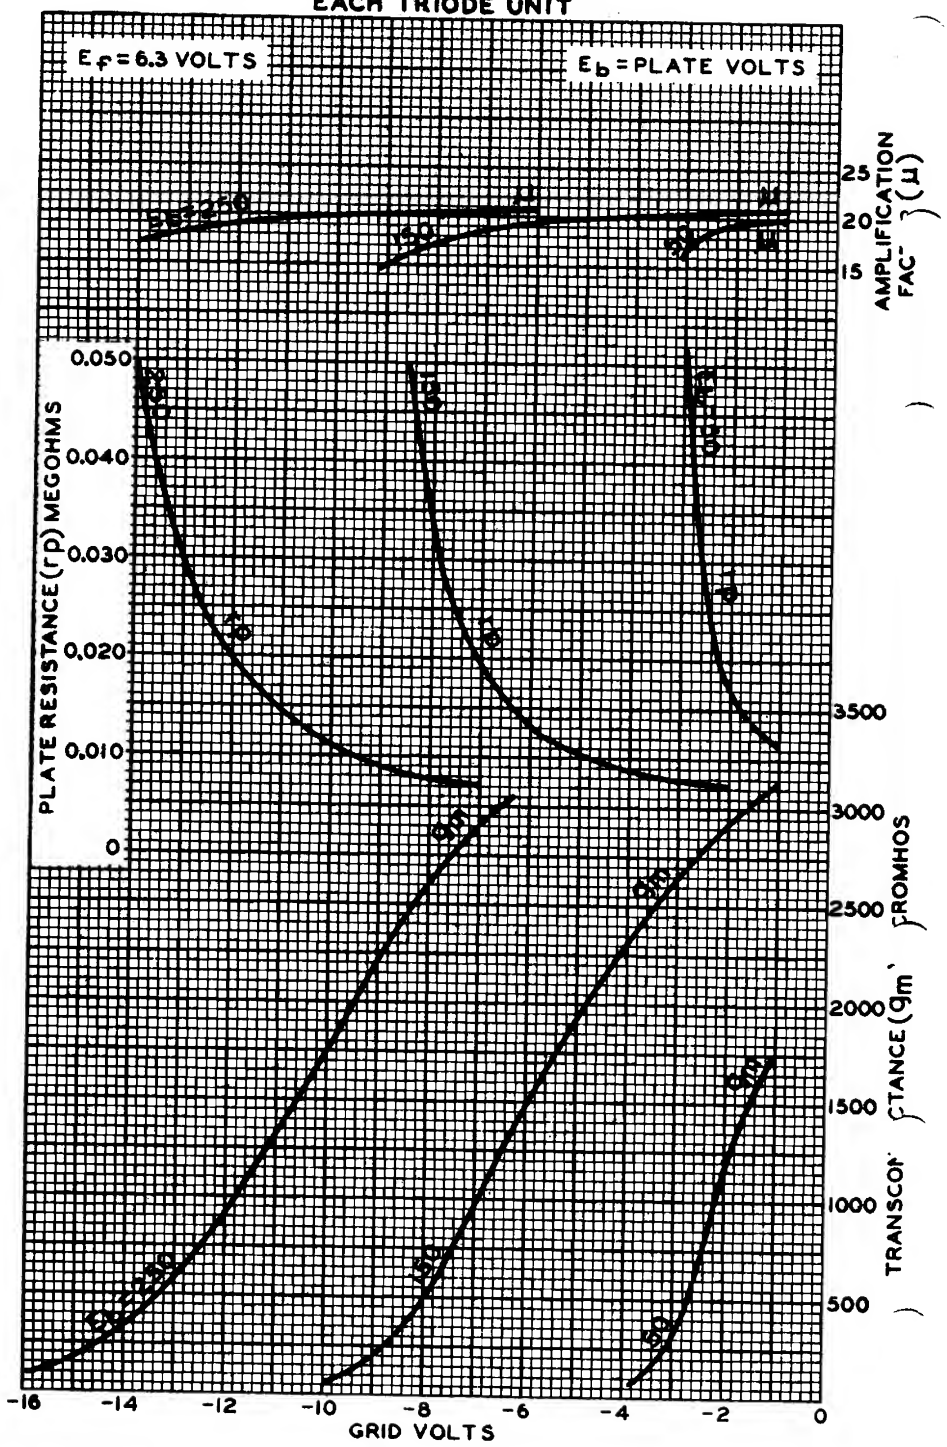

NOV. 10, 1947

TUBE DEPARTMENT
RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-6914